BOLLARD SHOP

Product Data Sheet

IN-GROUND BOLLARDS



114-IG-AT-SS

114mm Inground Bollard – Angled Top

A 114 mm angled-top grade 304 stainless steel bollard set in a concrete footing for permanent protection of buildings, equipment and people in car parks, loading docks and warehouses.

114 mm	1400 mm	3.4 mm	2
Diameter	Total length	Wall thickness	Hold-down lugs

SPECIFICATIONS

Code	114-IG-AT-SS
Material	**Stainless steel 304**
Diameter	**114 mm**
Height	**1400 mm**
Wall thickness	**3.4 mm**
Anchoring	**2 x 25 mm hold-down lugs**
Installation	**In-ground fixed**
Total length	**1400 mm**

DRAWINGS

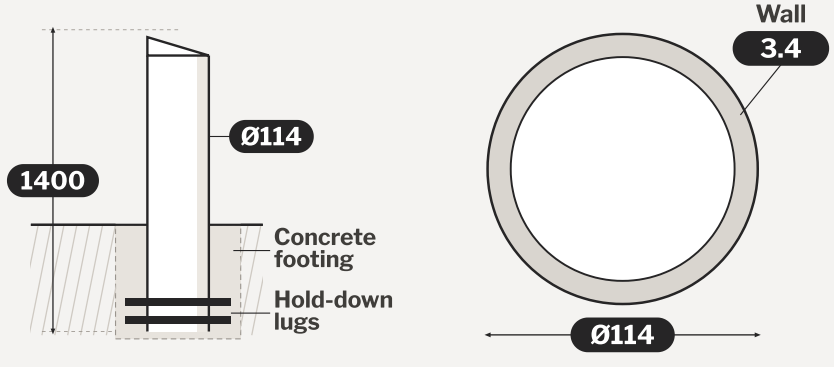

Side view (mm) Cross-section (mm)

Set in a concrete footing or structural epoxy. Footing size depends on your site. Step-by-step in-ground installation guide (PDF). Drawings not to scale.

BOLLARD SHOP

Key features

- Grade 304 stainless steel
- 3.4 mm wall thickness
- 2 x 25 mm hold-down lugs
- Set in concrete or structural epoxy

Other stainless sizes

114 mm 1400

140 mm 1200

Heights in mm.

Scan for price, stock and online ordering

Talk to our team:

Call 1300 766 003

Request a quote