BOLLARD SHOP

Product Data Sheet

IN-GROUND BOLLARDS



219-IG-SS-316

219mm Stainless Steel Inground Bollard – Flat Top

A 219 mm grade 316 stainless steel bollard set in a concrete footing for permanent protection of buildings, equipment and people in car parks, loading docks and warehouses.

219 mm	1800 mm	3 mm	2
Diameter	Total length	Wall thickness	Hold-down lugs

SPECIFICATIONS

Code	219-IG-SS-316
Material	**Stainless steel 316**
Finish	**#4 grade brushed satin**
Colour	**Silver**
Diameter	**219 mm**
Height	**1800 mm**
Wall thickness	**3 mm**
Anchoring	**Two 25 mm hold-down lugs**
Set in	**Concrete footing or structural epoxy**
Warranty	**2 year manufacturer warranty**

DRAWINGS

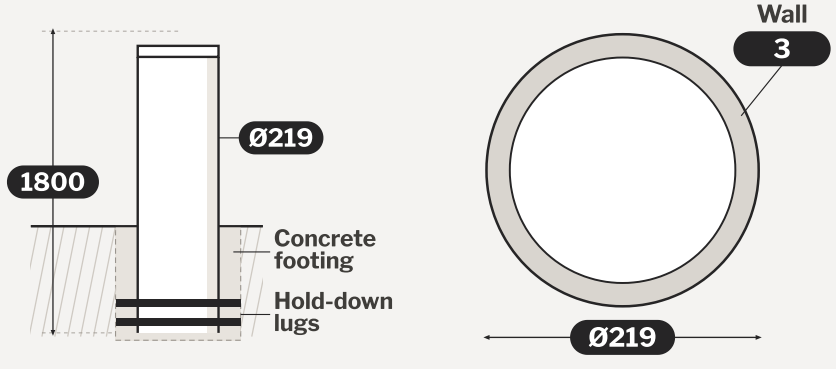

Side view (mm) Cross-section (mm)

Set in a concrete footing or structural epoxy. Footing size depends on your site. Step-by-step in-ground installation guide (PDF). Drawings not to scale.

2 YEAR WARRANTY



Key features

- Grade 316 stainless steel
- Brushed satin finish
- 3 mm wall thickness
- Two 25 mm hold-down lugs
- Set in concrete or structural epoxy

Other stainless sizes

114 mm	1500	1800
140 mm	1800	
141 mm	1800	
219 mm	1800	

Heights in mm.

Scan for price, stock and online ordering

Talk to our team:

Call 1300 766 003

Request a quote