BOLLARD SHOP

Product Data Sheet

WHEEL STOPS



WSR-3-1650

Rubber Wheel Stop 1650mm – 3 fixing points

A 1650 mm rubber wheel stop that shows drivers where to stop, protecting walls, walkways and other cars. UV-stabilised rubber with yellow markers that stand out in any car park.

1650 mm	100 mm	150 mm	3
Length	Height	Width	Fixing points

SPECIFICATIONS

Code	WSR-3-1650
Length	**1650 mm**
Width	**150 mm**
Height	**100 mm**
Material	**Rubber**
Colour	**Black/Yellow**
Fixing points	**3**
Installation	**Screw fixed**
Recommended fixings	**150 x 10 mm galvanised concrete screw**
Warranty	**2 year manufacturer warranty**

DRAWINGS

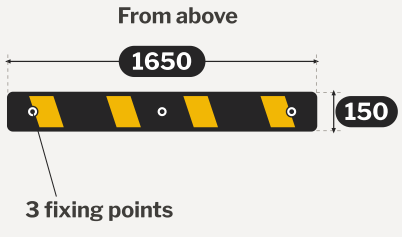

From above (mm)



End view (mm)

Fixings sold separately. For concrete, use 150 x 10 mm galvanised concrete screws. For asphalt, use 300 x 12 mm bitumen spikes. Drawings not to scale.

2 YEAR WARRANTY



Key features

- UV-stabilised rubber resists cracking
- Yellow markers for visibility
- 100 mm high
- 3 fixing points
- Concrete or asphalt
- Indoor and outdoor car parks

Other wheel stops

Rubber 4 points | **3 points**

Concrete 1650 | 2000

Rubber: 1650 mm long. Concrete: length in mm. Concrete wheel stops are WA only.

Scan for price, stock and online ordering

Talk to our team:

Call 1300 766 003

Request a quote